

## PRODUCT DATA SHEET

### DENEBOLA

#### Product typology

LED luminaire for indoor use (IP20) for installation on electrified track Eutrac

#### Material technical spec

Die-cast aluminum housing, black or white powder coated  
 Diffuser in PC material  
 Reflector in aluminum

**Color:** black or white

#### Lighting technical spec

LED light source in a fixed position for a round symmetrical light throw  
 Chip LUMILEDS 1204 COB  
 Beam angle 33° for 20 W model and 40° for 32 W model  
 Adjustable luminaire inclination  
 Immediately ON at 100% of light flux

#### Wiring technical spec



Driver included

#### Installation and maintenance technical spec

Simplified installation on electrified track Eutrac via two locking/unlocking levers  
 Wall or ceiling installation through the following accessories: Code: 65458W (white)  
 Code: 65458B (black)


#### Technical spec

- CRI	>90	- Nominal voltage	220-240 V
- Step McAdam	3	- Rated frequency	50/60 Hz
- Lifetime LED	35.000 h@25°C	- IP protection	IP20
- RG	1	- Power factor	>0,90
- Beam angle	33°/40°		

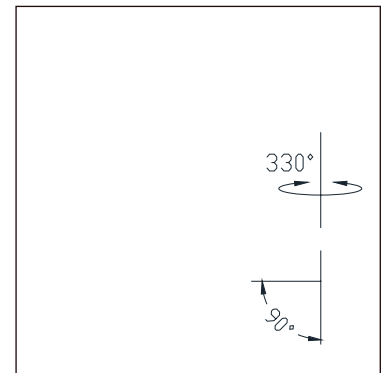

Pesi/Dimensioni	DENEBOLA 20 W	DENEBOLA 32 W
Net weight	540 g	1080 g
Gross weight	600 g	1200 g
Luminaire dimension	Ø72xh188 mm	Ø90xh237 mm
Single packaging	90x100x190 mm	120x130x250 mm
Multiple packaging (18 pcs)	290x320x400 mm (12 kg)	380x420x520 mm (23 kg)

CE IP20

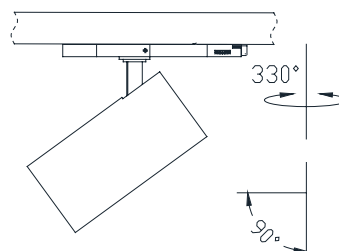

## Photometry

Beam angle 33°

Beam angle 40°

Codice Code	Descrizione prodotto Product description	Potenza Nominale Nominal Power	Temperatura colore Color temperature	Flusso apparecchio Luminaire flux
CE0390201B	DENEBOLA 15-20W 3000K BIANCO	15-20 W	3000 K	1.840 lm@ta25°C
CE0390201N	DENEBOLA 15-20W 3000K NERO	15-20 W	3000 K	1.840 lm@ta25°C
CE0390202B	DENEBOLA 15-20W 4000K BIANCO	15-20 W	4000 K	1.905 lm@ta25°C
CE0390202N	DENEBOLA 15-20W 4000K NERO	15-20 W	4000 K	1.905 lm@ta25°C
CE0390351B	DENEBOLA 25-35W 3000K BIANCO	25-35 W	3000 K	3.220 lm@ta25°C
CE0390351N	DENEBOLA 25-35W 3000K NERO	25-35 W	3000 K	3.220 lm@ta25°C
CE0390352B	DENEBOLA 25-35W 4000K BIANCO	25-35 W	4000 K	3.335 lm@ta25°C
CE0390352N	DENEBOLA 25-35W 4000K NERO	25-35 W	4000 K	3.335 lm@ta25°C
CE0490201B	DENEBOLA 15-20W 3000K BIANCO DALI	15-20 W	3000 K	1.840 lm@ta25°C
CE0490201N	DENEBOLA 15-20W 3000K NERO DALI	15-20 W	3000 K	1.840 lm@ta25°C
CE0490202B	DENEBOLA 15-20W 4000K BIANCO DALI	15-20 W	4000 K	1.905 lm@ta25°C
CE0490202N	DENEBOLA 15-20W 4000K NERO DALI	15-20 W	4000 K	1.905 lm@ta25°C
CE0490351B	DENEBOLA 25-35W 3000K BIANCO DALI	25-35 W	3000 K	3.220 lm@ta25°C
CE0490351N	DENEBOLA 25-35W 3000K NERO DALI	25-35 W	3000 K	3.220 lm@ta25°C
CE0490352B	DENEBOLA 25-35W 4000K BIANCO DALI	25-35 W	4000 K	3.335 lm@ta25°C
CE0490352N	DENEBOLA 25-35W 4000K NERO DALI	25-35 W	4000 K	3.335 lm@ta25°C