

PRODUCT DATA SHEET

SKAT

Product typology

LED downlight for false ceiling installation by using fixing clips. Indoor use (IP20)

Material technical spec

Housing in plastic material
 Diffuser in opal PC

Color: white

Lighting technical spec

LED light source in a fixed position for a round symmetrical light throw
 Immediately ON at 100% of light flux

Wiring technical spec


Integrated driver
 Simplified electrical connection by pre-wired bipolar cable 2x1mm², L=50mm

Installation and maintenance technical spec

Recessed installation in false ceiling by using fixing clips
 No ordinary maintenance required
 Hole dimension in the false ceiling: Ø70 mm

Technical spec

- CRI	>80	- Nominal voltage	220-240 V
- Step McAdam	3	- Rated frequency	50/60 Hz
- Lifetime LED	20.000 h@25°C	- IP protection	IP20
- RG	0	- Power factor	>0,50
- Beam angle	110°		

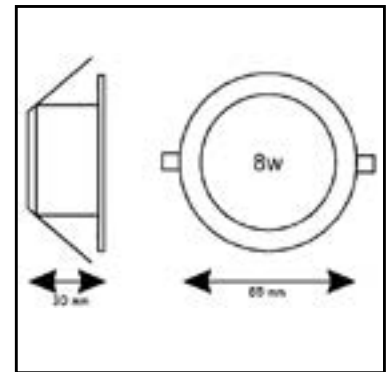


Weight/Dimension	SKAT 8 W
Net weight	75 g
Gross weight	100 g
Luminaire dimension	Ø85xh30 mm
Single packaging dimension	105x105x45 mm
Multiple packaging (40 pcs)	470x260x280 mm (5 kg)

CE IP20



Photometry

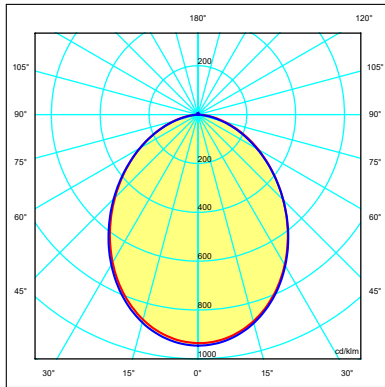

Beam angle 110°

Codice Code	Descrizione prodotto Product description	Potenza Nominale Nominal Power	Temperatura colore Color temperature	Flusso apparecchio Luminaire flux
83083	SKAT 8W 3000K	8 W	3000 K	640 lm@ta25°C
83084	SKAT 8W 4000K	8 W	4000 K	650 lm@ta25°C